


Custom Tailored Vehicle Electrical System

PROGRAMMABLE MULTIPLEX CONTROL

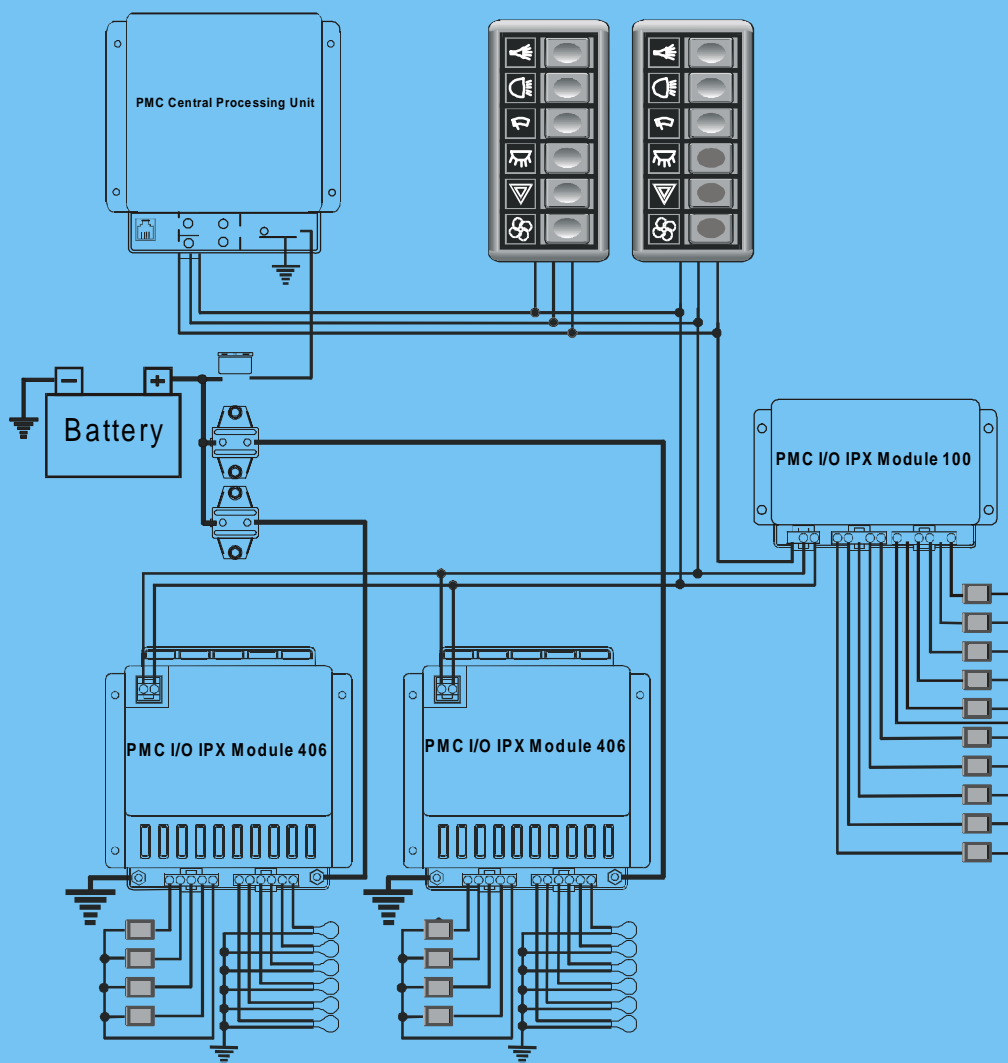

Intellitec



131 Eisenhower Ln. N.
Lombard, IL 60148
Ph (800) 251-2408
Fx (630) 916-7890

COPYRIGHT © 1997
PATENT PENDING




PMC CPU 98A **Central Processing Unit**

PMC CPU, is the main component of Intellitec's **Programmable Multiplex Control** family. It controls remote I/O modules through Intellitec's unique multiplex communications system (Pat. No. 4,907,222 and other Pat. Pend.). This multiplex system allows the **CPU**, I/O Modules and switch panels to be wired together with two small gauge wires. All input or switch information is gathered through the remote modules and directly communicated to the **CPU**. The **CPU** then interprets the inputs, determines the states of all outputs and communicates that information to the remote modules via the PMC communications link.

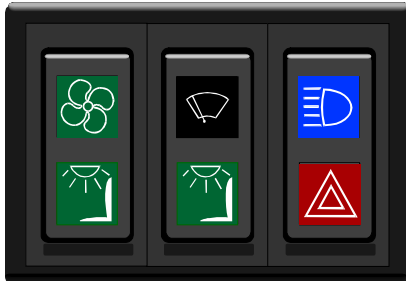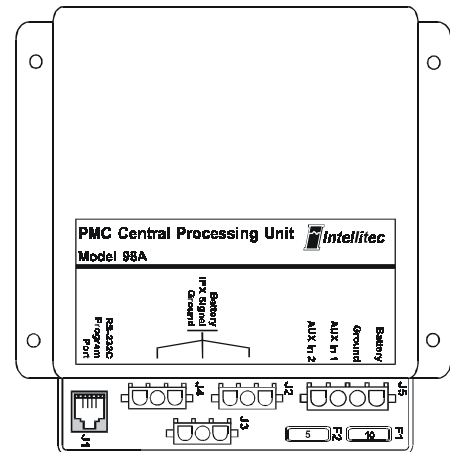


PMC Warning Light Adapter 806/816 **6 Warning Light Direct Plug-In Adaptor**

ITT warning lamps (also know as SWF, Britax, or Sprague) plug directly into the **806 or 816** Adapter, eliminating the need for a harness or separate wiring to each lamp. The lamps are controlled by the central PMC CPU via the two wire PMC communications link. The third wire provides power to the lamps. The PMC connection is made with an AMP Mate-N-Lok connector to reduce installation time and errors.

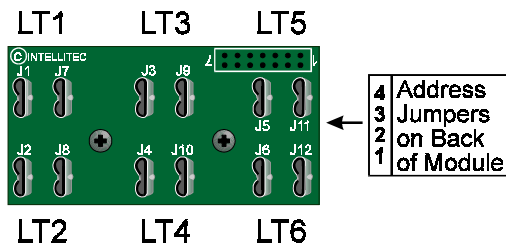


PMC I/O Module 406/416 **4 point DC Input / 6 point Relay Output**

The **406** provides power fusing, switching, and distribution in one module. It has two 15 amp SPST relays and four 10 amp SPST relays for switching loads to the battery. In addition there are four input connections for rocker, limit, or sensor switches. Each individual input can be configured as either a switch to ground, or a switch to battery. All input information is directly communicated to the CPU and all the relays are controlled by the CPU via the PMC communications link. All the output harnesses are connected with AMP Mate-N-Lok connectors to reduce installation time and errors.

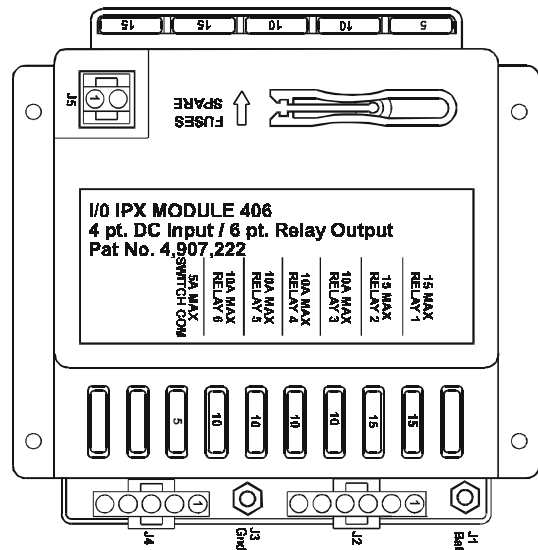

PMC Rocker Switch Adapter 906/916 6 Rocker Switch Direct Plug-In Adaptor

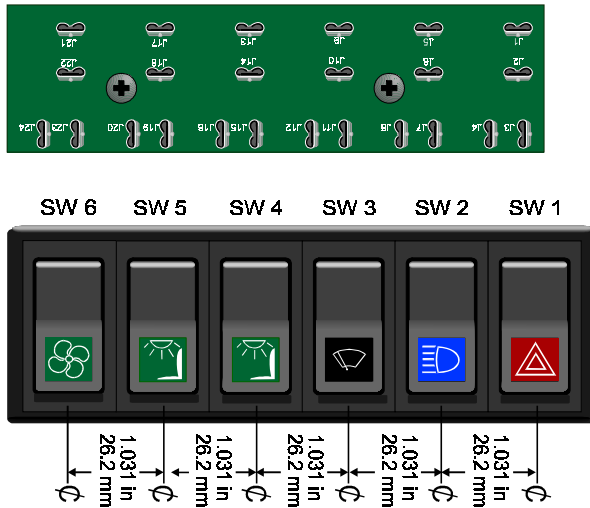


ITT rocker switches (also known as SWF, Britax, or Sprague) plug directly into the **906 or 916** Adapter, eliminating the need for a harness or separate wiring to each switch. All switch information is directly communicated to the PMC CPU via the two wire PMC communications link. The switch indicator lamps are controlled directly on the adaptor. When the switch is off, half of the battery voltage is supplied to the lamp for backlighting. When the switch is turned on, full battery voltage is applied to the lamp.


The switches do not control the loads or functions directly, they simply communicate information to the **PMC CPU**. Due to this fact, the switches do not have to be complex, eliminating the need for multiple poles or multiple throws. The switches can be more simple and less expensive, with the overall reduction of different types of switches.

PMC I/O Module 100/110 10 point DC Input

There are ten input connections for rocker, limit, or sensor switches. Each individual input can be configured as either a switch to ground, or a switch to battery. All input information is directly communicated to the **CPU** via the **PMC** communications link. The CPU utilizes this information to control other **PMC** output modules. All the output harnesses are connected with AMP Mate-N-Lok connectors to reduce installation time and errors.

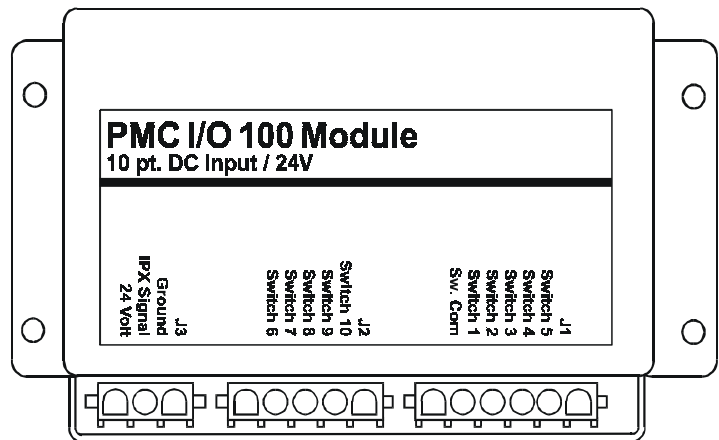

PMC Rocker Switch Adapter 909/919 9 Rocker Switch Direct Plug-In Adaptor

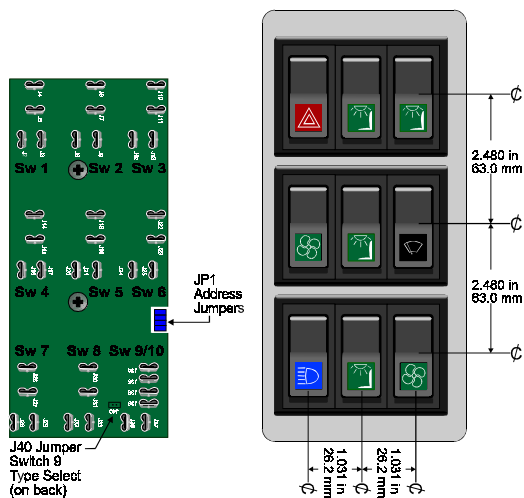

The switch indication lamps are controlled directly on the adaptor. When the switch is off, half of the battery voltage is supplied to the lamp for backlighting. When the switch is turned on, full battery voltage is applied to the lamp.

ITT rocker switches (also known as SWF, Fritax, or Sprague) plug directly into the 909 or 919 Adapter, eliminating the need for a harness or separate wiring to each switch. All switch information is directly communicated to the PMC CPU via the two wire PMC communications link.



Programmable Multiplex Control Modules

Model Part No.	Description	Vehicle Voltage	Function
Central Processing Units			
CPU 00-00620-971	Central Processing Unit	+12/24V	
Input Modules			
100 00-00622-100	10 point DC Input	+24V	10 DC Pos or Neg
110 00-00622-110	10 point DC Input	+12V	10 DC Pos or Neg
Low Wattage Output Modules			
300 00-00XXX-300	10 Low Watt Output Module	+24V	0.5A Ouput, 5 Pos 5 Neg
310 00-00XXX-310	10 Low Watt Output Module	+12V	0.5A Ouput, 5 Pos 5 Neg
Relay Output Modules			
406 00-00621-406	4 point DC Input / 6 point Relay Out Pos or Neg, 6 SPST Relay	+24V	4DCin
416 00-00621-416	4 point DC Input / 6 point Relay Out Pos or Neg, 6 SPST Relay	+12V	4DCin
400 00-00XXX-400	10 point DC In / 10 point Relay Out Pos, 2DCin Neg,8 SPST Relay	+24V	8DCin
410 00-00XXX-410	10 point DC In / 10 point Relay Out Pos, 2DCin Neg,8 SPST Relay	+12V	8DCin
Remote Backlit Rocker Switch Modules			
700 00-00645-700	10 Rocker Switch Module	+24V	Remote Switches w/backlight
710 00-00645-710	10 Rocker Switch Module	+12V	Remote Switches w/backlight
Warning Lamp Direct Plug-in Adapters			
806 00-00644-806	6 Warning Lamp Adapter	+24V	Plugs to 3 by 2 Britax Panel
816 00-00644-816	6 Warning Lamp Adapter	+12V	Plugs to 3 by 2 Britax Panel
Rocker Switch Direct Plug-in Adapters			
906 00-00643-906	6 Rocker Switch Adapter	+24V	Plugs to 6 by 1 Britax Panel
916 00-00643-916	6 Rocker Switch Adapter	+12V	Plugs to 6 by 1 Britax Panel
909 00-00656-909	9 Rocker Switch Adapter	+24V	Plugs to 3 by 3 Britax Panel
919 00-00656-919	9 Rocker Switch Adapter	+12V	Plugs to 3 by 3 Britax Panel
902 00-00XXX-902	12 Rocker Switch Adapter	+24V	Plugs to 6 by 2 Britax Panel
912 00-00XXX-912	12 Rocker Switch Adapter	+12V	Plugs to 6 by 2 Britax Panel
Complete Switch Panel Assemblies			
012 00-00623-012	6 Switch Panel	+24V	6 Momentary Switch Panel